

Valve

- 4V100
- 4V200
- 4V300
- 4V400
- Manifold
- 3V1
- JEL
- JZF
- MVSD
- VF, VZ
- BM, PU, AM
- Diaphragm
- Coil
- 2V
- 2W
- 2W(Big)
- 2P
- 2L
- VX
- PU
- PU225
- 2Q
- JEL5404
- JEL6213
- Pulse
- JEL, JZF
- 4H
- TSV86
- MPV
- 4HV
- HV, K
- 4R
- 4F**
- MSV
- JM
- ASC, RE
- QE, QEA
- ST
- HSV

## Ordering Code

4F	2	10	08	L	FV	320
↓	↓	↓	↓	↓	↓	↓
Specification	Series	Position Number	Port Size	Type	Specification	Position Number
4F: 5/2 way foot valve	2: 200 Series	10: Single head double position	08 : G 1/4"	Blank : Standard type L : With lock G : With protecting cover LG : With lock and protecting cover	Foot Valve	320 : 3/2 way 420 : 4/2 way

## Specification

Model	4F210-08	4F210-08L	4F210-08G	4F210-08LG	FV420	FV320
Working Medium	40 Micron Filtered Air					
Position Number	5/2 way				4/2 way	3/2 way
Port Size	Inlet, Outlet, Exhaust Port = G 1/4"				Inlet, Outlet = G 1/4" Exhaust Port = G 1/8"	
Operation	Direct					
Working Pressure	0 ~ 0.8 MPa					
Working Temperature	0 ~ 60 °C					

# 4F Series Foot Valve





The way to automation



## Overall Dimension

- Valve
- 4V100
- 4V200
- 4V300
- 4V400
- Manifold
- 3V1
- JEL
- JZF
- MVSD
- VF, VZ
- BM, PU, AM
- Diaphragm
- Coil
- 2V
- 2W
- 2W(Big)
- 2P
- 2L
- VX
- PU
- PU225
- 2Q
- JEL5404
- JEL6213
- Pulse
- JELJZF
- 4H
- TSV
- MPV
- 4HV
- HV, K
- 4R
- 4F**
- MSV
- JM
- ASC, RE
- QE, QEA
- ST
- HSV



4F210-08







4F210-08L



4F210-08G




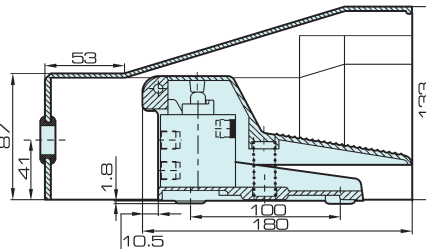


4F210-08LG

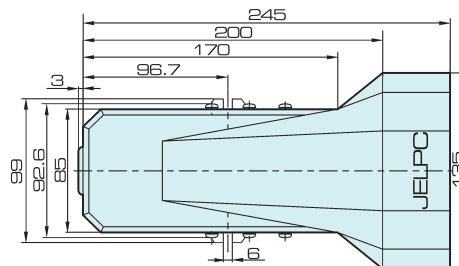
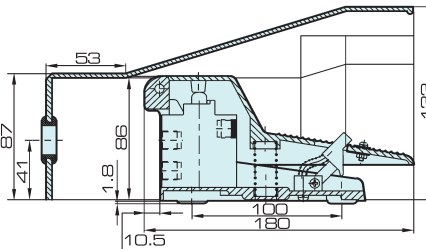
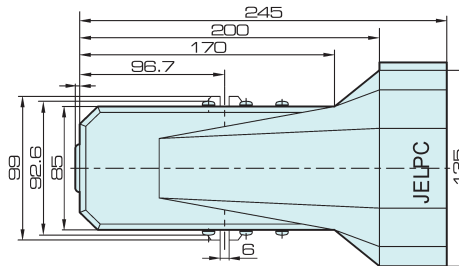


### Overall Dimension

#### FV420

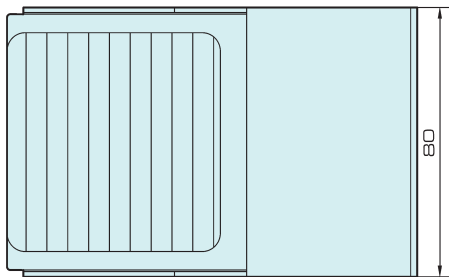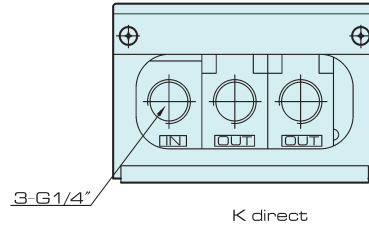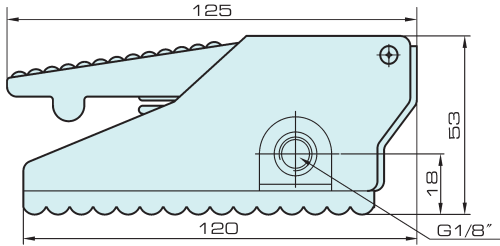

#### FV320

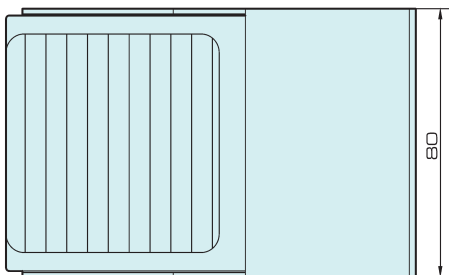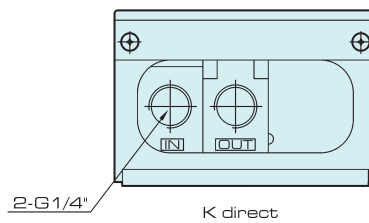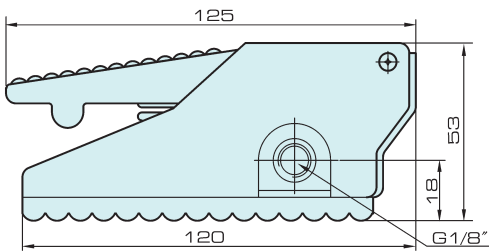

#### Valve

4V100

4V200

4V300

4V400

Manifold

3V1

JEL

JZF

MVSD

VF, VZ

BM, PU, AM

Diaphragm

Coil

2V

2W

2W(Big)

2P

2L

VX

PU

PU225

2Q

JEL5404

JEL6213

Pulse

JEL, JZF

4H

TSV86

MPV

4HV

HV, K

4R

**4F**

MSV

JM

ASC, RE

QE, QEA

ST

HSV