

- Cylinder
- Sizing
- SI
- SI A.
- SC / SU
- SCT**
- SC A.
- DSN
- DSN A.
- MA
- MAL
- MA/MAL A.
- SDA
- CQ2
- CJ2
- CDU
- TN
- CXS
- MGP
- MSQ


Ordering Code

SCT	63 x	30	50	S	LB
Series	Bore	Stroke 1	Stroke 2	Magnet	Mountings
SCT: Multi-position cylinder	32 40 50 63 80 100			S: With magnet Blank: Without magnet	Blank: Basic mounting LB: Foot FA: Front flange FB: Rear flange CA: Rear hinge CB: Rear hinge

*It is booster cylinder while second stroke is 0.

Overall Dimension

SCT

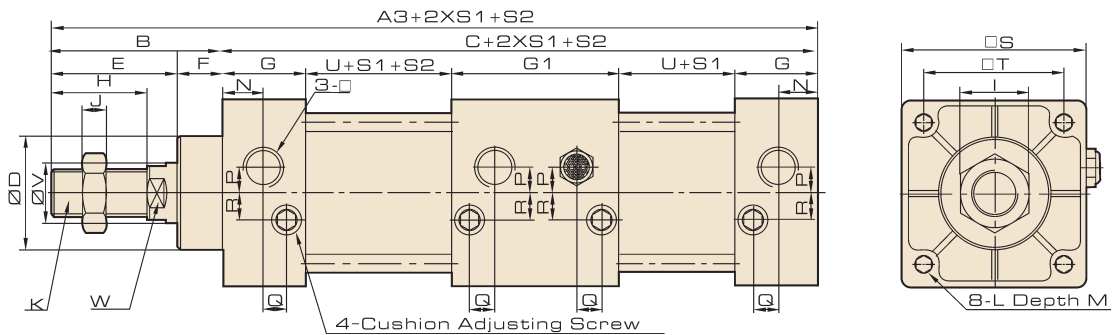

Dimension

Bore/ Symbol	A3	B	C	D	E	F	G	G1	H	I	J	K
32	233	47	186	28	32	15	27.5	55	22	17	6	M10 x 1.25
40	235	49	186	32	34	15	27.5	55	24	17	7	M12 x 1.25
50	243	57	186	38	42	15	27.5	55	32	23	8	M16 x 1.5
63	249	57	192	38	42	15	27.5	55	32	23	8	M16 x 1.5
80	296	75	221	47	54	21	33	73	40	26	10	M20 x 1.5
100	308	75	233	47	54	21	33	73	40	26	10	M20 x 1.5
125	350	104	122	55	70	34	33	66	54	40	10	M27 x 2

Bore/ Symbol	L	M	N	O	P	Q	R	S	T	V	U	W
32	M6 x 1	9.5	13.7	G1/8	3.5	7.5	7	45	33	12	38	10
40	M6 x 1	9.5	13.5	G1/4	6	8.2	9	50	37	16	38	14
50	M6 x 1	9.5	13.5	G1/4	8.5	8.2	9	62	47	20	38	17
63	M8 x 1.25	9.5	13.5	G3/8	7	8.2	8.5	75	56	20	41	17
80	M10 x 1.5	11.5	16.5	G3/8	10	9.5	14	94	70	25	41	22
100	M10 x 1.5	11.5	16.5	G1/2	10	9.5	14	112	84	25	47	22
125	M12 x 1.75	15.5	16.5	G1/2	10	10	11	140	110	32	57	27